

Reflections in gyrotrons with axial output

メタデータ	<p>言語: English</p> <p>出版者:</p> <p>公開日: 2008-02-14</p> <p>キーワード (Ja):</p> <p>キーワード (En):</p> <p>作成者: IDEHARA, Toshitaka, WATANABE, Satoru, KIMURA, A, SASAGAWA, H, AGUSU, L, MITSUDO, Seitaro, PIOSCZYK, Bernhard</p> <p>メールアドレス:</p> <p>所属:</p>
URL	http://hdl.handle.net/10098/1604

= 2004 Institute of Electrical and Electronics Engin

Reflections in Gyrotrons With Axial Output

Olgierd Dumbrajs, *Senior Member, IEEE*, Toshitaka Idehara, Satoru Watanabe, A. Kimura, H. Sasagawa, L. Agusu, Seitaro Mitsudo, and Bernhard Piosczyk

Abstract—Influence of reflections on operation of gyrotrons with axial output is studied both theoretically and experimentally. By way of example the Fukui large orbit gyrotron with a permanent magnet operating in third harmonic at frequency 89 GHz is considered. In the case of strong reflection ($|R| = 0.6$), extreme sensitivity of output power on the reflection phase is found. A qualitative agreement between theory and experiment is observed.

Index Terms—Frequency tuneability Rieke diagram, gyrotron, reflections.

I. INTRODUCTION

REFLECTIONS of microwave power can take place at the gyrotron RF output window.

Advanced high-power gyrotrons used for fusion applications have radial output. Here, the RF signal after leaving the cavity hits the launcher in which an individual rotating high-order cavity mode loses its identity and is converted into a linearly polarized Gaussian output beam. This beam is guided by means of phase-corrected mirrors to the output window. In general, the RF signal reflected from the window is dissipated in the entire volume of the tube and only a small part returns to the cavity. Theoretical interpretation of experimental results as obtained, for example, in [1] on reflections in the TE_{22,6} mode gyrotron operated at Forschungszentrum Karlsruhe, is complicated [2]. In calculations, it is assumed that reflections occur at the cavity exit and that the reflected RF signal returns to the cavity as the specific original cavity mode. Although predictions of such a simple model [3] cannot be tested experimentally, they give some feeling of possible impact of reflections on operation of gyrotrons with a radial output. In reality, the reflected Gaussian beam is transformed inside the launcher into the oppositely rotating mode which returns to the cavity. Competition between opposite rotations of one and the same mode in the cavity has to be considered. This interesting problem is under investigation and the results will be published somewhere else.

In this paper, we study reflections in low-power gyrotrons. Such gyrotrons have an axial output. In this case, the situation

is much simpler. There are neither mirrors, nor launcher in the tube. No mode transformation takes place. The RF signal reflected from the window returns to the cavity as the original mode. A meaningful comparison between theory and experiment is possible using relatively simple tools described below.

II. GENERAL FORMALISM

It is convenient to describe reflections by means of a complex reflection coefficient R written as [2]

$$R = |R| \cdot \exp \left[i \frac{4\pi}{\lambda} (L_R + \Delta L_R) \right] \quad (1)$$

where ℓ is the wavelength of gyrotron oscillations, L_R is the distance between the cavity exit and the reflecting plane, and ΔL_R is the shift of the plane. The period of the phase of R is $\Delta L_R = \lambda/2$. The reflection coefficient can be introduced into the usual boundary condition at the cavity exit

$$f(\zeta_{out}, \tau) = \frac{i}{k} \cdot \frac{\partial f(\zeta, \tau)}{\partial \zeta} \Big|_{\zeta=\zeta_{out}} \cdot \left(\frac{1-R}{1+R} \right) \quad (2)$$

where k is the wave number and f is the RF amplitude to be found by solving the system of partial parabolic differential equations [4]

$$\begin{cases} \frac{\partial p}{\partial \zeta} + i(\Delta + |p|^2 - 1)p = if \\ \frac{\partial^2 f}{\partial \zeta^2} - i \frac{\partial f}{\partial \tau} + \delta f = \frac{I}{2\pi} \int_0^{2\pi} p d\nu_0 \end{cases} \quad (3)$$

Here, p is the transverse momentum of the electron, ζ is the longitudinal coordinate, Δ is frequency mismatch, τ is time, δ is the cutoff frequency along ζ , I is current, and ϑ_0 is the initial phase of the electron.

III. FUKUI GYROTRONS

Gyrotrons developed at the Fukui University, Research Center for Development of Far Infrared Region (FIR), have medium power (several 10 W to several 10 kW) [5]. These gyrotrons are used as microwave sources for application to new far-infrared technologies. They have demonstrated frequency tuneability in a broad range (from 30 GHz to 889 GHz). All Fukui gyrotrons have axial output.

Reflections in these gyrotrons may result in a significant change of the output power. This is a serious problem for frequency-tuneable gyrotrons, especially for ultra broad-band Fukui gyrotrons. For example, in the 12-T gyrotron [6] which is step tuneable over the range 145–639 GHz, the output power in many modes was so low that it could not even be specified (see [6, Table I]). Understanding the influence of reflections on

Manuscript received August 27, 2003; revised October 14, 2003.

O. Dumbrajs is with the Research Center for Development, Far-Infrared Region, Fukui University, Fukui 910-8507, Japan, also with the Department of Engineering Physics and Mathematics, Helsinki University of Technology, Association Euratom – Tekes, P.O.Box 2200, FIN-02015 HUT, Finland, and also with the Forschungszentrum Karlsruhe, Institut für Hochleistungsimpuls- und Mikrowellentechnik, Association Euratom – FZK, Hermann – von – Helmholtz-Platz 1, D-76344 Eggenstein – Leopoldshafen, Germany (e-mail: olgierd.dumbrajs@hut.fi).

T. Idehara, S. Watanabe, A. Kimura, H. Sasagawa, L. Agusu, and S. Mitsudo, are with the Research Center for Development, Far-Infrared Region, Fukui University, Fukui 910-8507, Japan.

B. Piosczyk is with Forschungszentrum Karlsruhe, Institut für Hochleistungsimpuls- und Mikrowellentechnik, Association Euratom – FZK, Hermann – von – Helmholtz, D-76344 Eggenstein – Leopoldshafen, Germany.

Digital Object Identifier 10.1109/TPS.2004.827596

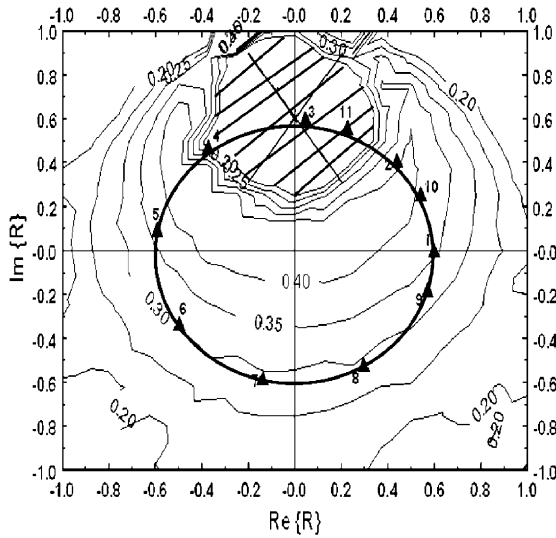


Fig. 1. Rieke diagram for the $TE_{3,1}$ mode. The equipower lines in arbitrary units cover power range 0.2, . . . , 0.4 in steps of 0.05. There are no oscillations in the crossed \otimes region. The circle corresponds to $|R| = 0.6$ and the triangles with labels to indicated phases in Fig. 2.

gyrotron operation is important for enhancing the most attractive feature of Fukui gyrotrons – their broad-band tuneability.

For our study, we have chosen the recently constructed large-orbit gyrotron [7]. This gyrotron has a permanent magnet. It operates at third harmonic in the $TE_{3,1}$ mode at frequency $F = 89$ GHz and at fourth harmonic in the $TE_{4,1}$ mode at frequency $F = 113$ GHz.

IV. NUMERICAL SIMULATION

To model reflections in this gyrotron, we have chosen the third harmonic operation. For a specific operation point ($U = 37$ kV, $\alpha = 1.0$, $R_{el} = 0.082$ mm, $I = 1.0$ A, and $B = 1.118$ T), we assumed arbitrary values of R and calculated the so-called Rieke diagram. In this diagram, contours of constant output power are plotted in the plane of the real and imaginary part of R (Fig. 1).

It is seen that the output power depends very strongly on both the magnitude and the phase of the reflection coefficient.

Next, for a specific absolute value of the reflection coefficient ($|R| = 0.6$) we calculated the oscillation region as a function of the magnetic field for many values of ΔL_R , varied from 0.0 mm (label 1) to 2.00 mm (label 11) in steps of 0.2 mm (see Fig. 2). Here, the convention is such that for ΔL_R the reflection phase is taken to be zero.

It can be seen that at low values of the magnetic field (hard excitation region) the output power very strongly depends on ΔL_R , i.e., on the phase of the reflection coefficient. The hard excitation region itself is displaced due to reflections. For some reflection phases the total operation region is significantly broadened (for example, 1), for other phases (for example, 7) it is strongly reduced in comparison with the reflectionless case (dotted curve).

It should be mentioned that reflections change not only the output power of a gyrotron, but also slightly change the oscillation frequency (the so called frequency pulling, see, e.g.,

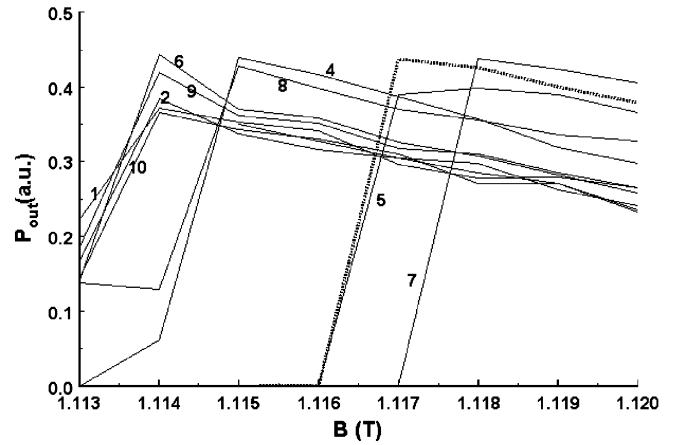


Fig. 2. Theoretical oscillation regions of the $TE_{3,1}$ mode for fixed $|R| = 0.6$ but different ΔL_R . The dotted curve marks the oscillation region in the case of no reflections. The curve 6 corresponding to $\Delta L_R = 1.0$ mm begins at 1.122 T and is outside the scale of the figure. The results at $B = 1.118$ T can be directly compared with the circle in the Rieke diagram shown in Fig. 1.

[2]). In principle, this effect can be calculated also by means of the equation system (2) by dropping in it the time derivative, in other words, by using a self-consistent stationary theory. In this paper, this has not been done, because our primary interest, both from the theoretical and experimental point of view, lies in investigating efficiency (power) changes due to reflections. Frequency changes due to reflections are negligible corrections to individual oscillation frequencies in specific modes at specific magnetic fields in Fukui gyrotrons and are neglected.

V. EXPERIMENT

A boron nitride (BN) 1.0-mm-thick plate was manufactured. For frequency $F = 89$ GHz the reflection coefficient of this plate is $|R| = 0.6$. In the experiment, the plate was placed between two spacers. The lower spacer rests on the gyrotron window which is transparent for this frequency. The BN plate was moved between the two spacers within the 2 mm interval—which exceeds the required distance $\Delta L_R = \lambda/2 = 1.68$ mm—to move along the closed circle with the constant radius $|R| = 0.6$ in the Rieke diagram.

The results of the measurements are shown in Fig. 3.

It is also evident that the experiment demonstrates very strong dependence of the output power on the phase of the reflection coefficient. Shift of the hard excitation region to lower magnetic fields is also observed. It should be emphasized that curve numberings in Figs. 2 and 3 do not correspond to each other, because the absolute phase of the reflection coefficient which depends on the distance between the cavity exit and the gyrotron window is not known.

A quantitative comparison between theory and experiment is difficult, because in the experiment the precise value of the pitch factor was not known. On the other hand, calculations demonstrate that the dependence of the output power on the magnetic field, as shown in Fig. 2, is rather sensitive with respect to the pitch factor. For example, with $\alpha = 1.4$ and all other parameters as before, the theory predicts that for many reflection phases the generated power is higher than in the reflectionless case.

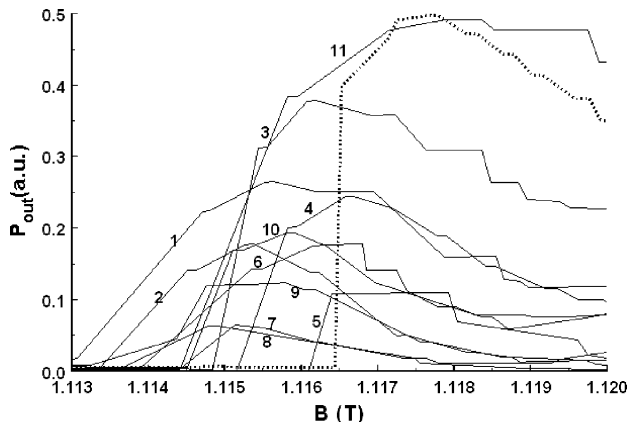


Fig. 3. Experimental oscillation regions of the $TE_{3,1}$ mode for fixed $|R| = 0.6$ but different ΔL_R (0.0 – 2.0 mm) in steps of 0.2 mm. The dotted curve marks the oscillation region in the case of no reflections. There is no correspondence between numbering of the curves in this figure and in Fig. 2 (see text).

VI. CONCLUSION

In the case of large reflections considered in this paper, ($|R| = 0.6$), high sensitivity of the efficiency of the gyrotron operation on the reflection phase is found both in the theoretical calculations and experimental measurements. This finding is important for the FIR FU gyrotron development program whose goal is to develop ultra broad-band tuneable gyrotrons. Optimal output power at all operating frequencies could be achieved by installing a carefully designed movable disk outside the gyrotron just above the gyrotron window. By individual adjusting of the distance between this disk and the window for each generated frequency at a particular magnetic field one could either increase or decrease the reflection and, thus, regulate the output power. This can be regarded as a superior alternative to elimination of reflections at all frequencies by using a Brewster window [8].

REFERENCES

- [1] G. Dammertz, O. Braz, A. K. Chopra, K. Koppenburg, M. Kuntze, B. Piosczyk, and M. Thumm, "Recent results of the 1 MW, 140 GHz, $TE_{22,6}$ mode gyrotron," *IEEE Trans. Plasma Sci.*, vol. 27, pp. 330–339, Apr. 1999.
- [2] A. Grudiev, "Numerical study of nonstationary phenomena in gyro-oscillators," Ph.D. dissertation, Technical Univ., Hamburg-Harburg, Germany, 2002.
- [3] M. I. Airila, O. Dumbrajs, P. Kall, and B. Piosczyk, "Influence of reflections on the operation of the 2 MW, CW 170 GHz coaxial cavity gyrotron for ITER," *Nucl. Fusion*, vol. 43, pp. 1454–1457, Nov. 2003.
- [4] N. S. Ginzburg, G. S. Nusinovich, and N. A. Zavolsky, "Theory of nonstationary processes in gyrotrons with low Q resonators," *Int. J. Electron.*, vol. 61, pp. 881–894, Dec. 1986.
- [5] T. Idehara, I. Ogawa, S. Mitsudo, M. Pereyaslavets, N. Nishida, and K. Yoshida, "Development of frequency tuneable, medium power gyrotrons (Gyrotron FU series) as submillimeter wave radiation sources," *IEEE Trans. Plasma Sci.*, vol. 27, pp. 340–354, Apr. 1999.
- [6] Y. Shimizu, S. Makino, K. Ichikawa, T. Kanemaki, T. Tatsukawa, T. Idehara, and I. Ogawa, "Development of submillimeter wave gyrotron using 12 T superconducting magnet," *Phys. Plasmas*, vol. 2, pp. 2110–2116, June 1995.
- [7] T. Idehara, I. Ogawa, K. Ohashi, and Y. Iwata, "Development of high harmonic gyrotrons using a permanent magnet system" (in Japanese), *IEEEJ Trans. Fundamentals Mater.*, vol. 123, p. 989, Oct. 2003.
- [8] O. Braz, G. Dammertz, M. Kuntze, and M. Thumm, "D-Band frequency step-tuning of a 1 MW gyrotron using a Brewster output window," *Int. J. Infrared Millimeter Waves*, vol. 18, pp. 1465–1477, Aug. 1997.



Olgierd Dumbrajs (SM'98) was born in Riga, Latvia. He received the B.S. degree in theoretical physics from the Latvian State University, Riga, in 1965, and the Ph.D. degree in theoretical particle physics from Moscow State University, Moscow, U.S.S.R., in 1971.

From 1971 to 1985, he was with the Joint Institute for Nuclear Research, Dubna, U.S.S.R., and at several European Nuclear Research Centers. At that time, he published many papers on nuclear and particle physics. In 1985, he joined the Gyrotron Project at the Forschungszentrum Karlsruhe, Karlsruhe, Germany. Since 1995, he has been a member of the Experts Group, Coordinating Committee, European Commission for Development Program for the Electron Cyclotron Wave Systems. He is a Professor of Theoretical Physics at Riga Transport and Telecommunication Institute. He is now a Special Research Worker with the Academy of Finland and with the Department of Engineering Physics and Mathematics at the Helsinki University of Technology, Espoo, Finland. His current research interests are in the field of gyrotron theory, nonlinear dynamics, and plasma physics.

Dr. Dumbrajs is a life member of the American Physical Society. In 2001, he was elected a full member of the Latvian Academy of Sciences.



Toshitaka Idehara was born in Ibara, Japan, on April 15, 1940. He received the B.S. degree in mathematics and the M.S. and D.S. degrees in physics from Kyoto University, Kyoto, Japan, in 1963, 1965, and 1968, respectively.

After graduating from Kyoto University, he joined Fukui University, Fukui, Japan, and was a Lecturer from 1968 to 1970 and an Associate Professor from 1970 to 1990. During this term, he worked in fundamental plasma physics. After 1979, his interest was directed toward the development of high-frequency gyrotrons. From 1990 to 1999, he was a Professor in the Applied Physics Department, Fukui University, and from 1992 to 1999, he was the Head of the Laboratory for Application of Superconducting Magnet, Fukui University. Since 1999, he has been a Professor and the Director of the Research Center for Development of Far-Infrared Region, Fukui University. His current research interests include development of frequency tuneable, submillimeter wave gyrotrons, and their applications to plasma diagnostics and material physics.



Satoru Watanabe was born in Aichi, Japan, on July 28, 1980. He received the B.S. degree in engineering from Fukui University, Fukui, Japan, in 2003, where he is working toward the M.S. degree in engineering.

His research interests include the development of submillimeter-wave gyrotrons.

A. Kimura was born in Aichi, Japan, on March 28, 1981. He received the B.S. degree in engineering from Fukui University, Japan, where he is currently working towards the M.S. degree in engineering.

His research interests include the development of submillimeter wave gyrotrons.

H. Sasagawa was born in Niigata, Japan, on October 7, 1977. He received the B.S. and M.S. degrees in engineering from Fukui University, Japan, in 2002 and 2004, respectively.

After graduating, he joined Pentax Corporation as a researcher. His research interests include the development of submillimeter wave gyrotrons.

L. Agus was born in Buton, Indonesia, on August 17, 1971. He received the B.S. degree in material physics from Hasanuddin University, Indonesia, in 1997, and the M.S. degree in applied physics from Gadjah Mada University, Indonesia, in 2001. He is currently working towards the D.S. degree in engineering at Fukui University, Japan.


His research interests include the development of submillimeter wave gyrotrons.



Seitaro Mitsudo was born in Okayama, Japan, on April 17, 1965. He received the B.S., M.S., and D.S. degrees in physics from Okayama University, Okayama, Japan, in 1989, 1991, and 1994, respectively.

After graduating from Okayama University, he joined the Institute for Materials Research, Tohoku University, Sendai, Japan. From 1994 to 1998, he was a Research Associate. During this term, he worked in high-field magnetism. From 1998 to 1999, he was with the Applied Physics Department, Fukui

University, Fukui, Japan, as an Associate Professor. Since 1999, he has been an Associate Professor with the Research Center for Development of Far-Infrared Region, Fukui University. His current research interests include development of frequency tunable, submillimeter wave gyrotrons, and their application for submillimeter wave ESR.



Bernhard Piosczyk received the Dipl.Ing. degree in physics from the Technical University of Berlin, Germany, in 1969 and the Dr.rer.nat. degree from the University of Karlsruhe, Karlsruhe, Germany in 1974.

Since 1970, he has been with the Research Center (Forschungszentrum) Karlsruhe, first in the field of RF-superconductivity for accelerator application, then in the development of CW, high-current H^+ and H^- ion sources and since 1987 in the development of high-power gyrotrons.